




Part & Spare Parts

Accessories : Sandpiper Pump

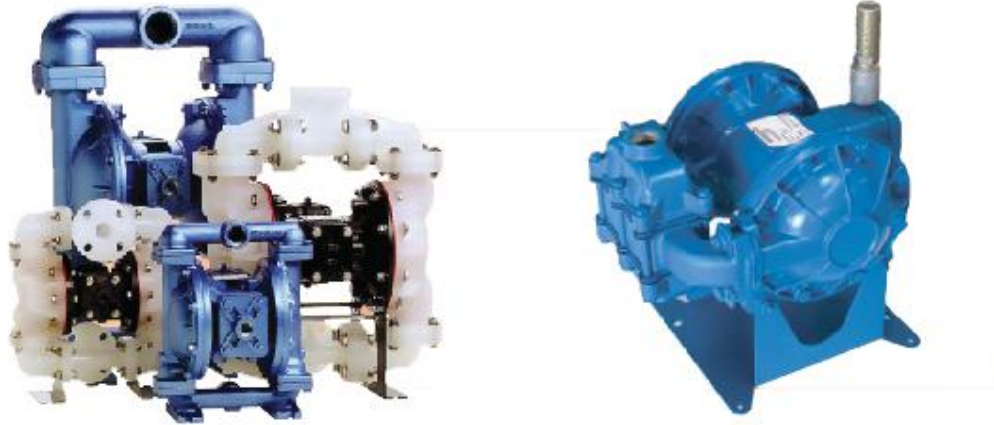

"Is there a diaphragm pump that can be operated by NATURAL GAS?"

"I need a BOTTOM PORTED ball valve pump to move liquid with solids that settle."

"I need to pump a Flammable fluid."

Model	Intake/Discharge pipe size	Capacity / Minute		Solid-Handling		Heads up to	Displacement (Gallon)	Stroke (Liter)
		Gallons	liters	Up To	In (mm)			
SB 1 A	SB1 A: 1" (25mm) NPT (F)	0 to 42	0 to 159	nearly 1/4"	6.3	125 psi or 289 ft. of water (8.8 Kg/cm ² or 88 meters)	0.9	0.34
S 05	1/2" NPT or 1/2" BSP (internal) 1" NPT or 1" BSP (external)	0 to 15	0 to 56	0.125	3	125 psi or 289 ft. of water (8.6 Kg/cm ² or 86 meters)	0.026	0.098
S 1	1" NPT (internal) 1" BSPT Tapered (internal)	0 to 45	0 to 170	0.25	6	125 psi or 289 ft. of water (8.6 Kg/cm ² or 86 meters)	0.11	0.42
S 15	1 1/2" NPT (internal) 1 1/2" BSPT Tapered (internal)	0 to 106	0 to 401	0.25	6	125 psi or 289 ft. of water (8.6 Kg/cm ² or 86 meters)	0.41	1.55
S 20	2" NPT (internal) 2" BSPT Tapered (internal)	0 to 150	0 to 567	0.25	6	125 psi or 289 ft. of water (8.6 Kg/cm ² or 86 meters)	0.42	1.59
S 30	3" NPT (internal) 3" BSPT Tapered (internal)	0 to 235	0 to 889	0.25	6	125 psi or 289 ft. of water (8.6 Kg/cm ² or 86 meters)	0.94	3.56

P.General Products : 234 Moo.5, Prakasa Road. , Prakasa, Muang, Samutprakarn 10280 Thailand.

Tel: (662) 728-5246-8 Fax: (662) 728-5249

E-mail: info@p-general.com